

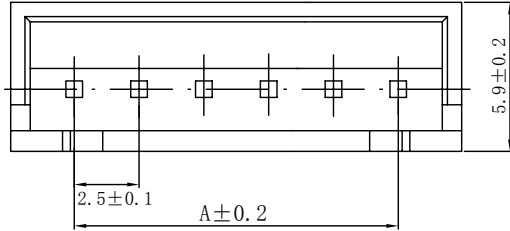



Specifications:
 Operating Voltage:250V AC/DC
 Current Rating:3A AC/DC
 Withstand Voltage:1000V AC/Minute
 Contact Resistance: $\leq 10m\Omega$
 Insulation resistance: $\geq 1000m\Omega$
 Operating Temperature: $-25^{\circ}C \sim +85^{\circ}C$
 Material:PA66 UL94V-0
 PIN Brass Tin-plated

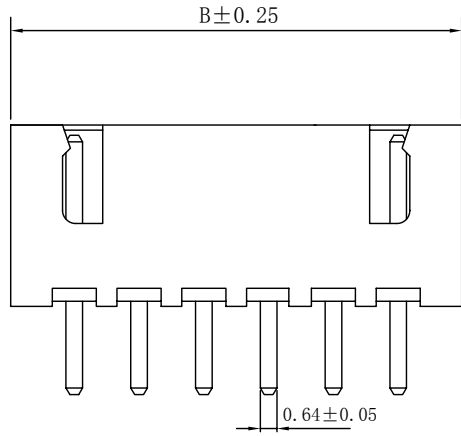

PCB LAYOUT

| P数 | 尺寸 (mm) | |
|----|---------|------|
| | A | B |
| 2 | 2.5 | 7.5 |
| 3 | 5.0 | 10.0 |
| 4 | 7.5 | 12.5 |
| 5 | 10.0 | 15.0 |
| 6 | 12.5 | 17.5 |
| 7 | 15.0 | 20.0 |
| 8 | 17.5 | 22.5 |
| 9 | 20.0 | 25.0 |
| 10 | 22.5 | 27.5 |
| 11 | 25.0 | 30.0 |
| 12 | 27.5 | 32.5 |
| 13 | 30.0 | 35.0 |
| 14 | 32.5 | 37.5 |
| 15 | 35.0 | 40.0 |
| 16 | 37.5 | 42.5 |

一般公差
TOLERANCES
 X. ± 0.40 .XX ± 0.20
 .X ± 0.30 .XXX ± 0.10
 ANGLES $\pm 2^{\circ}$

深圳市宏利电子有限公司
Shenzhen Holy Electronic Co.,Ltd

检验尺寸标示
SYMBOLS \odot \ominus INDICATE CLASSIFICATION DIMENSION
 \odot MARK IS CRITICAL DIM.
 \ominus MARK IS MAJOR DIM.

工程图号 XH25-nA 制图(DR) *10/03/22
 品名 XH2.5-nA 直针 审核(CHKD)
 TITLE XH2.5mm Pitch A DIP CONN 核准(APPD) Rigo Lu

表面处理 (FINISH)

比例 (SCALE) 1:1 单位 (UNITS) mm 张数 (SHEET) 1 OF 1 尺寸 (SIZE) A4 版数 (REV) 0

| 修订 REV | 修改摘要 REVISION DESCRIPTION | 日期 DATE | 签名 SIGNATURE |
|-----------|------------------------------|------------|-----------------|
| - | - | - | - |