

A

B



C

D




E

F

Specifications:
Operating Voltage:125V AC(rms)/DC
Current Rating:1.0A AC(rms)/DC
Withstand Voltage:500V AC/rms
Contact Resistance:20mΩ max
Insulation resistance:100 mΩ min
Operating Temperature:-25℃~+85℃
1:Seat: LCP natural
2:Contact pin: brass (tinned)
3:Solder lugs: brass (tin-plated)

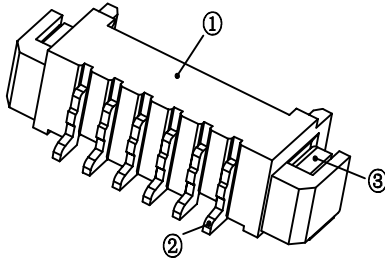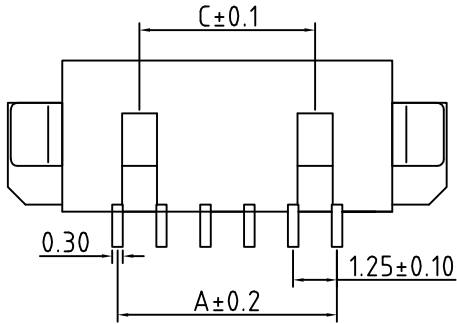

Pin	A	B	C
2	1.25	7.50	
3	2.50	8.75	
4	3.75	10.00	2.50
5	5.00	11.25	3.75
6	6.25	12.50	5.00
7	7.50	13.75	6.25
8	8.75	15.00	7.50
9	10.00	16.25	8.75
10	11.25	17.50	10.00
11	12.50	18.75	11.25
12	13.75	20.00	12.50
13	15.00	21.25	13.75
14	16.25	22.50	15.00
15	17.50	23.75	16.25
16	18.75	25.00	17.50

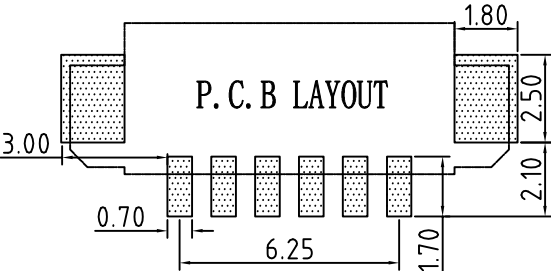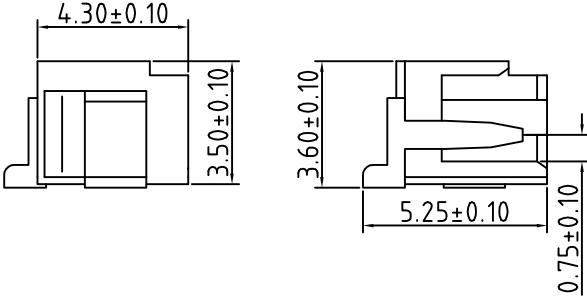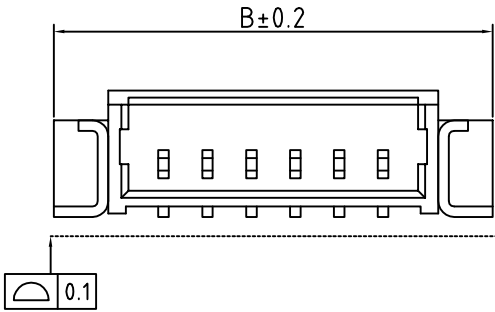

一般公差
TOLERANCES
X. ±0.40 .XX ±0.20
.X ±0.30 .XXX ±0.10
ANGLES ±2°

检验尺寸标示
SYMBOLS INDICATE
CLASSIFICATION DIMENSION

 MARK IS CRITICAL DIM.
 MARK IS MAJOR DIM.

表面处理 (FINISH)

工程
图号
MX125WB(01)-nP

品名
MX1.25mm(01) - nP 卧贴

TITLE
MX1.25mm Pitch WB FOR
SMT CONN

比例 (SCALE)
1:1

单位 (UNITS)
mm

制图 (DR)
'10/03/22

审核 (CHKD)

核准 (APPD)
Rigo Lu

张数 (SHEET)
1 OF 1

SIZE
A4

REV
0

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
△	-	-	-