

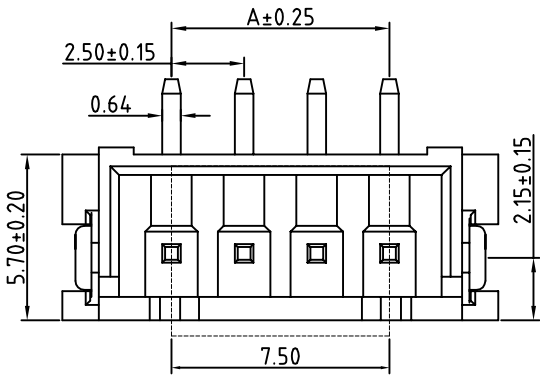
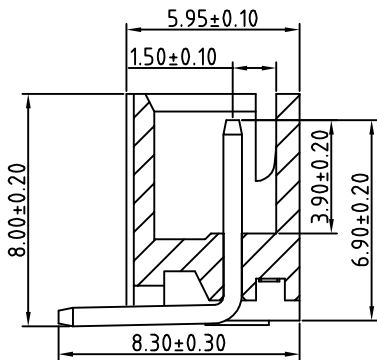
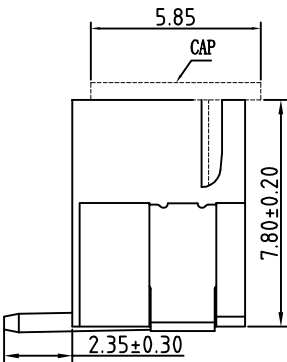


Specifications:
Operating Voltage:250V AC(rms)/DC
Current Rating:3.0A AC(rms)/DC
Withstand Voltage:1000V AC/rms
Contact Resistance:20mΩ max
Insulation resistance:800 mΩ min
Operating Temperature:-25℃~+85℃
1:Seat: LCP natural
2:Contact pin: brass (tin-plated)
3:Solder lugs: brass (tin-plated)
4:Cap:LCP natural



Pin	A	B	C
2	2.50	10.00	7.50
3	5.00	12.50	10.00
4	7.50	15.00	12.50
5	10.00	17.50	15.00
6	12.50	20.00	17.50
7	15.00	22.50	20.00
8	17.50	25.00	22.50
9	20.00	27.50	25.00
10	22.50	30.00	27.50
11	25.00	32.50	30.00
12	27.50	35.00	32.50
13	30.00	37.50	35.00
14	32.50	40.00	37.50
15	35.00	42.50	40.00
16	37.50	45.00	42.50

深圳市宏利电子有限公司
Shenzhen Holy Electronic Co.,Ltd

工程图号	XH254LB(01)-nP	制图 (DR)	'10/03/22
品名	XH2.54mm(01) - nP 立贴	审核 (CHKD)	
TITLE	XH2.54mm Pitch LB FOR SMT CONN	核准 (APPD)	Rigo Lu
比例 (SCALE)	1:1	单位 (UNITS)	mm
表面处理 (FINISH)		张数 (SHEET)	1 OF 1
		SIZE	A4
		REV	0

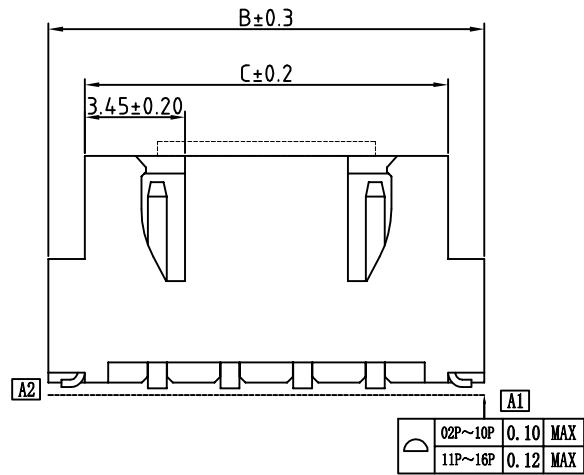

2PIN结构

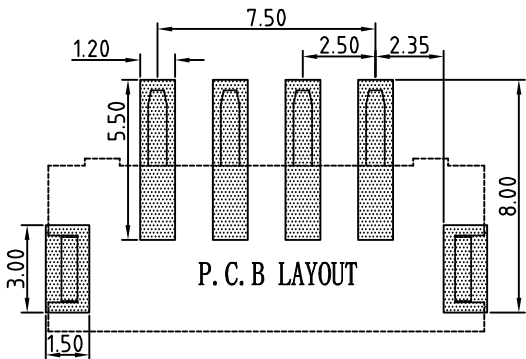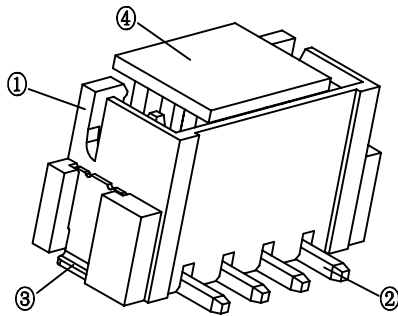

P.C.B LAYOUT

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE