

1

1

2

2

3

3

4

4

5

5

Specifications:

Operating Voltage:250V AC(rms)/DC

Current Rating:1.0A AC(rms)/DC

Withstand Voltage:500V AC/rms

Contact Resistance:20mΩ max






Insulation resistance:500 mΩ min

Operating Temperature:-25℃~+85℃


1:Seat: LCP natural

2:Contact pin: brass (tin-plated)

3:Solder lugs: brass (tin-plated)

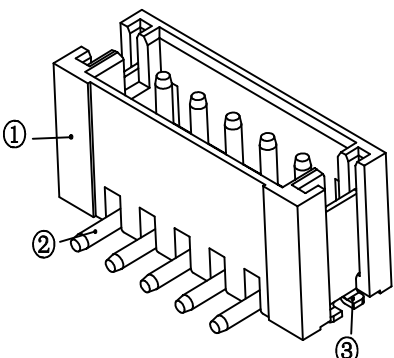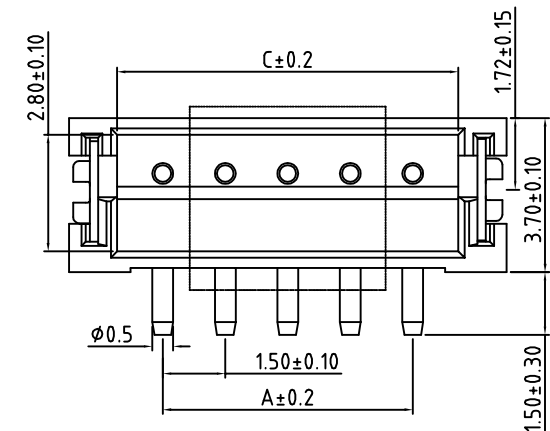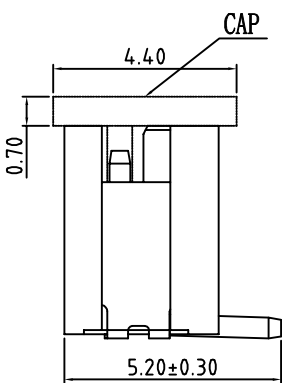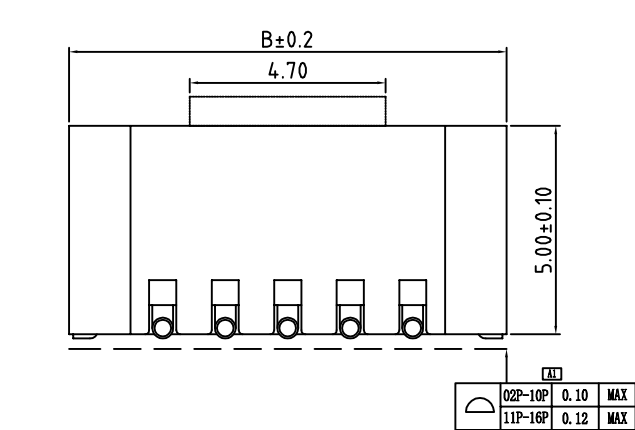

Pin	A	B	C
2	1.50	6.00	3.65
3	3.00	7.50	5.15
4	4.50	9.00	6.65
5	6.00	10.50	8.15
6	7.50	12.00	9.65
7	9.00	13.50	11.15
8	10.50	15.00	12.65
9	12.00	16.50	14.15
10	13.50	18.00	15.65
11	15.00	19.50	17.15
12	16.50	21.00	18.65
13	18.00	22.50	20.15
14	19.50	24.00	21.65
15	21.00	25.50	23.15
16	22.50	27.00	24.65

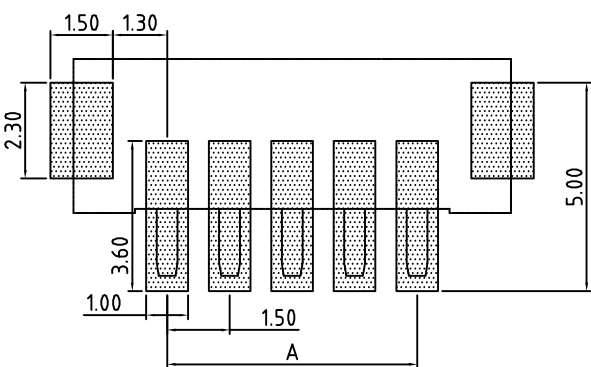

P. C. B LAYOUT

一般公差
TOLERANCES
X. ±0.40 .XX ±0.20
.X ±0.30 .XXX ±0.10
ANGLES ±2°

检验尺寸标示
SYMBOLS Ⓢ Ⓜ INDICATE
CLASSIFICATION DIMENSION
Ⓢ MARK IS CRITICAL DIM.
Ⓜ MARK IS MAJOR DIM.

表面处理 (FINISH)

工程
图号
品名
TITLE
比例 (SCALE)
1:1

ZH15LB(01)-nP

ZH1.5mm(01) - nP 卧贴

ZH2.5mm Pitch LB FOR
SMT CONN

单位 (UNITS)
mm

制图 (DR)
'10/03/22
审核 (CHKD)
核准 (APPD)
Rigo Lu

张数 (SHEET)
1 OF 1
SIZE
A4
REV
0

深圳市宏利电子有限公司
Shenzhen Holy Electronic Co.,Ltd

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-